


T•LUCE®

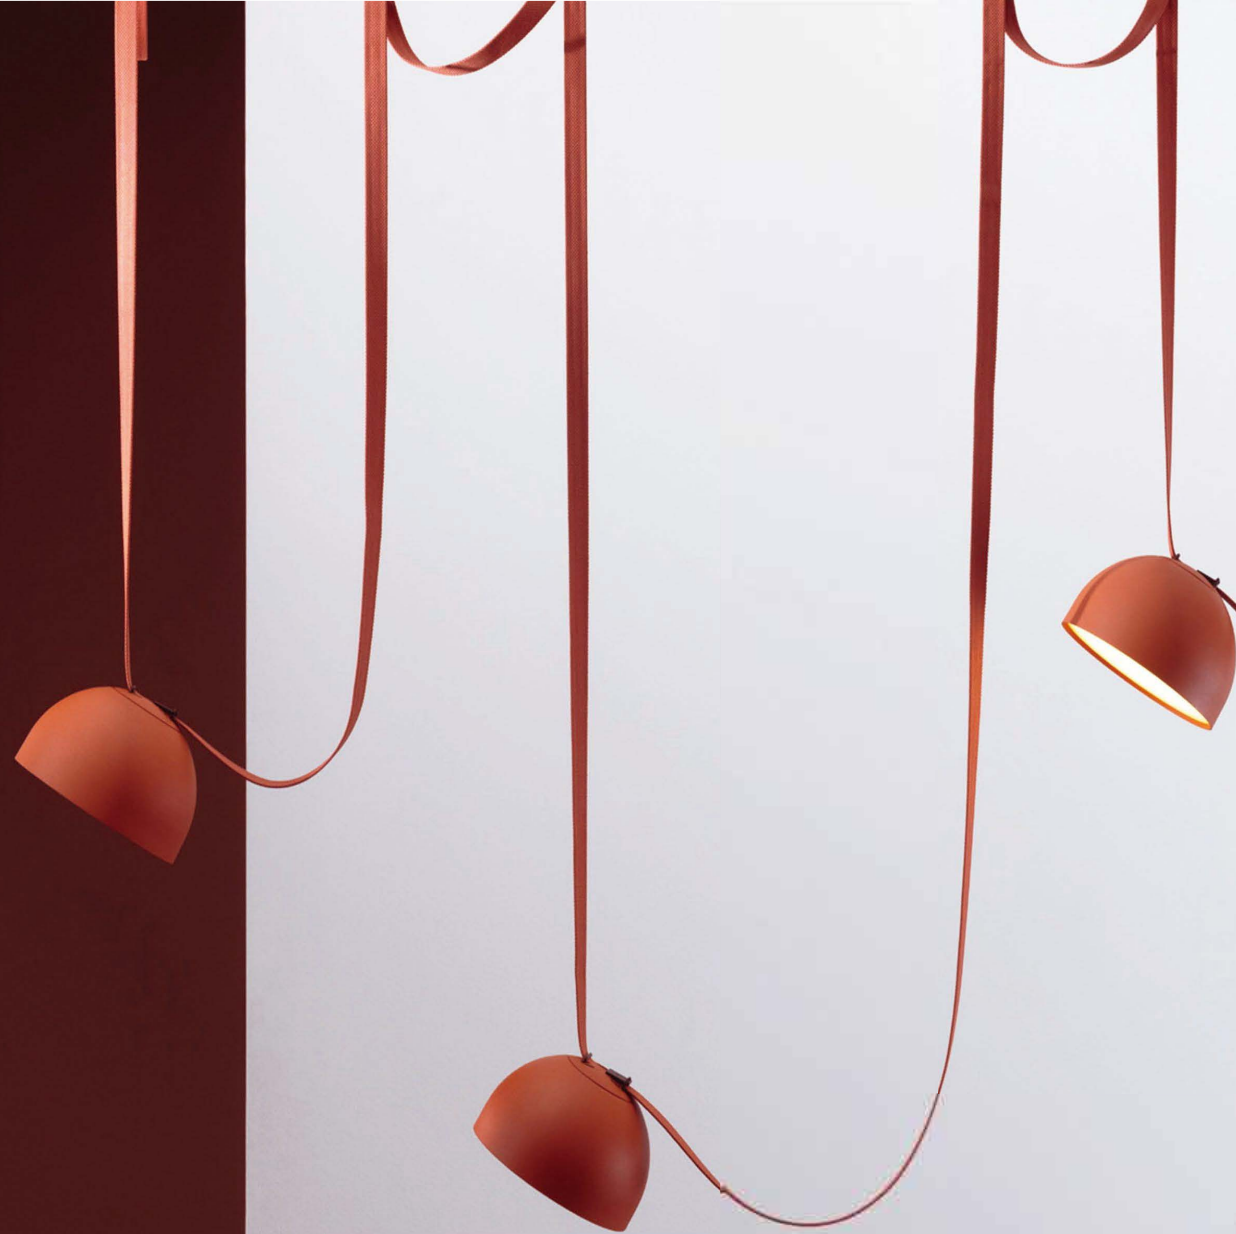


LED BELT TRACK LIGHTING SYSTEM

R26

BELT LAMP SERIES

LED Belt Track Lighting System that takes the concept of the light rail to a new level. No limited to set rails on horizontal plane, but design and create infinite possibility in stereoscopic space. The conductive textile ribbon at its core allows for free placement of the luminaires and the creation of unique light solutions on the spot.

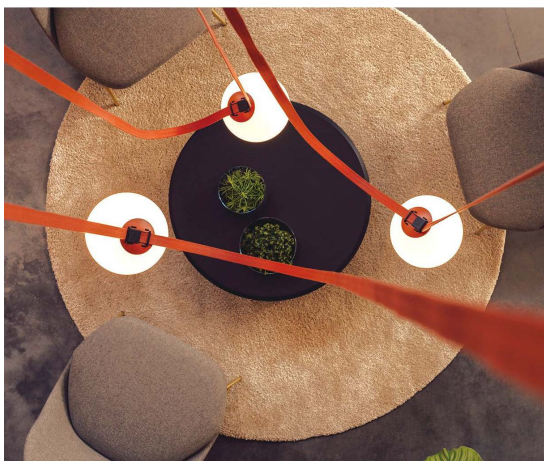

Easy connection

Fix / Click / Connect


Belt can be cutted as needed, accommodates multiple lights and operates with simple plug-in technology for unparalleled ease of installation and connection. The belt offers adjustments in tension from taut to relaxed as well as click-and-connect functionality, snapping into a buckle attached to each luminaire.




01

LINEAR DIFFUSER

It provides a high range of uniformity on the horizontal plane, and generates the first layer of illumination on which to add more specific lighting applications. It generates soft shadows and subdued brightness in the space, and its component elements do not display visual hierarchies

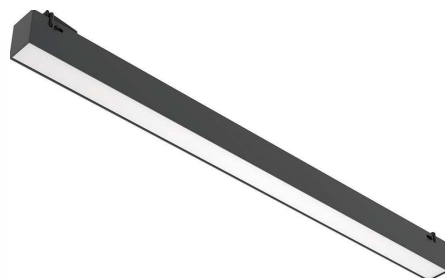


TL-C0118-32A




Color: white/black/brown
 LED: 10W/ 800LM
 CCT: 3000K/4000K/tunable white
 CRI: >90
 Beam: 110°
 Voltage: DC24V
 Dimming options: TRIAC/0-10V/DALI/TUYA

TL-C0118-640A




Color: white/black/brown
 LED: 20W/ 1600LM
 CCT: 3000K/4000K/tunable white
 CRI: >90
 Beam: 110°
 Voltage: DC24V
 Dimming options: TRIAC/0-10V/DALI/TUYA

TL-C0118-96A



Color: white/black/brown
 LED: 30W/ 2400LM
 CCT: 3000K/4000K/tunable white
 CRI: >90
 Beam: 110°
 Voltage: DC24V
 Dimming options: TRIAC/0-10V/DALI/TUYA

TL-C0118-128A




Color: white/black/brown
 LED: 40W/ 3200LM
 CCT: 3000K/4000K/tunable white
 CRI: >90
 Beam: 110°
 Voltage: DC24V
 Dimming options: TRIAC/0-10V/DALI/TUYA



02

LINEAR LIGHT

As an ideal lighting for the workplace, appropriate brightness and clear form with direct lighting, extended beams and high lamp performance gives the light with high energy efficiency and low UGR level below 19

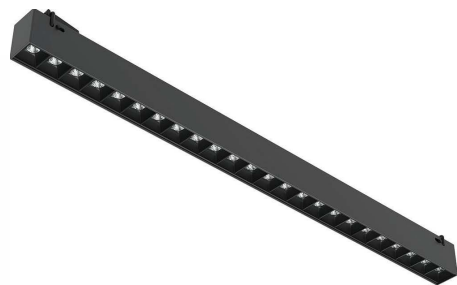


TL-C0118-12A



Color: white/black/brown
 Power: 12W/ 960LM
 CCT 3000K/4000K/tunable white
 CRI >90
 Beam: 12°/34°/48°
 Voltage: DC24V
 Dimming options: TRIAC/0-10V/DALI/TUYA

TL-C0118-24A



Color: white/black/brown
 Power: 24W/ 1900LM
 CCT 3000K/4000K/tunable white
 CRI >90
 Beam: 12°/34°/48°
 Voltage: DC24V
 Dimming options: TRIAC/0-10V/DALI/TUYA

TL-C0118-36A



Color: white/black/brown
 LED: 36W/ 2800LM
 CCT 3000K/4000K/tunable white
 CRI >90
 Beam: 12°/34°/48°
 Voltage: DC24V
 Dimming options: TRIAC/0-10V/DALI/TUYA

TL-C0118-48A



Color: white/black/brown
 LED: 48W/ 3800LM
 CCT 3000K/4000K/tunable white
 CRI >90
 Beam: 12°/34°/48°
 Voltage: DC24V
 Dimming options: TRIAC/0-10V/DALI/TUYA




03

POLARIZED LINEAR LIGHT

Provides medium brightness and clear form. Polarized light, extended beams, and fixture performance give the unit high energy efficiency and low UGR level below 19. It is also ideal for combining the effect of wall washing with background.




TL-C0115-32A




Color: white/black/brown
 LED: 12W/ 960LM
 CCT: 3000K/4000K/tunable white
 CRI: >90
 Beam: Polarized 20°
 Voltage: DC24V
 Dimming options: TRIAC/0-10V/DALI/TUYA

TL-C0115-64A




Color: white/black/brown
 LED: 24W/ 1900LM
 CCT: 3000K/4000K/tunable white
 CRI: >90
 Beam: Polarized 20°
 Voltage: DC24V
 Dimming options: TRIAC/0-10V/DALI/TUYA

TL-C0115-96A



Color: white/black/brown
 Power: 36W/ 2800LM
 CCT: 3000K/4000K/tunable white
 CRI: >90
 Beam: Polarized 20°
 Voltage: DC24V
 Dimming options: TRIAC/0-10V/DALI/TUYA

TL-C0115-128A



Color: white/black/brown
 Power: 48W/ 3800LM
 CCT: 3000K/4000K/tunable white
 CRI: >90
 Beam: Polarized 20°
 Voltage: DC24V
 Dimming options: TRIAC/0-10V/DALI/TUYA


04 SPOT LIGHT / DIRECTED DIFFUSION LIGHT

Use dense cones of light to emphasize objects or architectural elements. Brightness contrast attracts the eye, bringing illuminated objects into focus into the foreground. Directed diffusion light emits soft light, generates low contrasts between the illuminated areas and the shadows cast. Ideal for reading situations or when light output is visible, because it works without glare

SEMISPHERE 05

SEMISPHERE
Emits a soft light that generates low contrasts between the illuminated areas and the shadows cast. The opaque part of the shade helps to direct the light through the diffuser, providing illumination that is both peaceful and concentrated at the same time

TL-C0119-100A




Color:	white/black/brown
LED:	10W/ 810LM
CCT:	3000K/4000K/tunable white
CRI:	>90
Beam:	15°/24°/36°
Voltage:	DC24V
Dimming options:	TRIAC/0-10V/DALI/TUYA

TL-C0119-100B



Color:	white/black/brown
LED:	10W/ 780LM
CCT:	3000K/4000K/tunable white
CRI:	>90
Beam:	110°
Voltage:	DC24V
Dimming options:	TRIAC/0-10V/DALI/TUYA

TL-C0125-200A



Color:	white/black/brown
LED:	10W/ 750LM
CCT:	3000K/4000K/tunable white
CRI:	>90
Beam:	110°
Voltage:	DC24V
Dimming options:	TRIAC/0-10V/DALI/TUYA

TL-C0125-300A



Color:	white/black/brown
LED:	20W/ 1530LM
CCT:	3000K/4000K/tunable white
CRI:	>90
Beam:	110°
Voltage:	DC24V
Dimming options:	TRIAC/0-10V/DALI/TUYA



06 SPHERE

Distributes light equally in all directions (360°). It attracts a relaxed gaze towards the point of light, and creates a calm, very comfortable atmosphere. The light sphere bathes all surfaces of the space, Producing a peaceful, richer and extremely homogeneous ambiance



CONE LIGHT 07

Emits a soft light that generates low contrasts between the illuminated areas and the shadows cast. The opaque part of the shade helps to direct the light through the diffuser, providing illumination that is both peaceful and concentrated at the same time

TL-C0126-200A

210
Ø200

Color:	white/black/brown
LED:	8W/ 580LM
CCT:	3000K/4000K/tunable white
CRI:	>90
Beam:	360°
Voltage:	DC24V
Dimming options:	TRIAC/0-10V/DALI/TUYA

TL-C0126-300A

310
Ø300

Color:	white/black/brown
LED:	16W/ 1160LM
CCT:	3000K/4000K/tunable white
CRI:	>90
Beam:	360°
Voltage:	DC24V
Dimming options:	TRIAC/0-10V/DALI/TUYA

TL-C0128-600A

165
Ø595

Color:	white/black/brown
LED:	16W/ 1130LM
CCT:	3000K/4000K/tunable white
CRI:	>90
Beam:	110°
Voltage:	DC24V
Dimming options:	TRIAC/0-10V/DALI/TUYA

R26- Accessories (Optional)




R26 - Conductive Textile Belt



- Black
- Brown
- Blue (Customized)
- Green (Customized)



10m/20m/30m Option 1

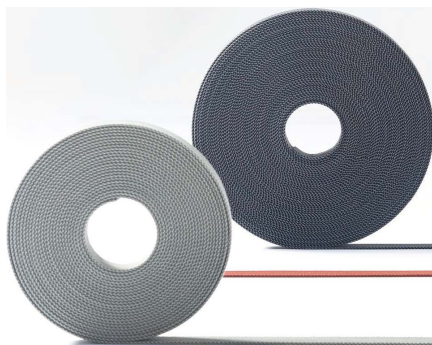


R26-Hanging Rod 1200mm



▶ Terminal Accessories

▶ 26-Round Power Box



R26-Surface Terminal Box

Ø80




▶ Fixed Accessories

▶ R26-Belt Fixed Base

Ø48



R26-Linear Power Box



R26-Recessed Terminal Box



R26-Locating Rack




▶ Other Accessories

R26-Suspended End Cap



R26-Suspended Buckle



R26-Electric Connector





